


穴用C型止メ輪 (スナップリンク)

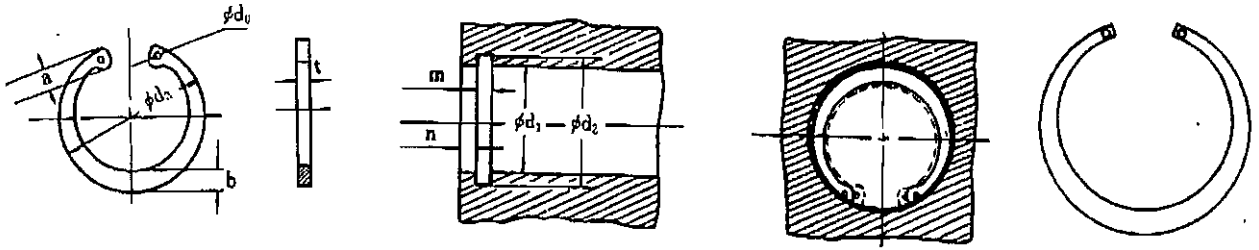


呼び径170%以上

呼び径 d_1	止メ輪 寸法					
	d_3		c		b	d_0
	寸法	公差	寸法	公差	約	最少
310	327	+1.80 -0.9	6	±0.2	17	5
320	337				17	
330	347				18	
340	357				18	
350	367				20	
360	377				20	
370	387				20	
380	397				20	
390	407				20	
400	417				20	
410	430	+2.0 -1.0	7	±0.2	23	6
420	440				23	
430	450				23	
440	460				23	
450	470				23	
460	480				24	
470	490				24	
480	500				24	
490	510				24	
500	520				24	
510	535	+3.0 -1.5	8	±0.2	25	6
520	545				25	
530	555				25	
540	565				25	
550	575				25	
560	585				26	
570	595				26	
580	605				26	
590	615				26	
600	625				26	

其の他、規格外及び図面に依る呼び径300以上1,000迄、設計製作いたします。

軸用C型止メ輪(スナップリング)

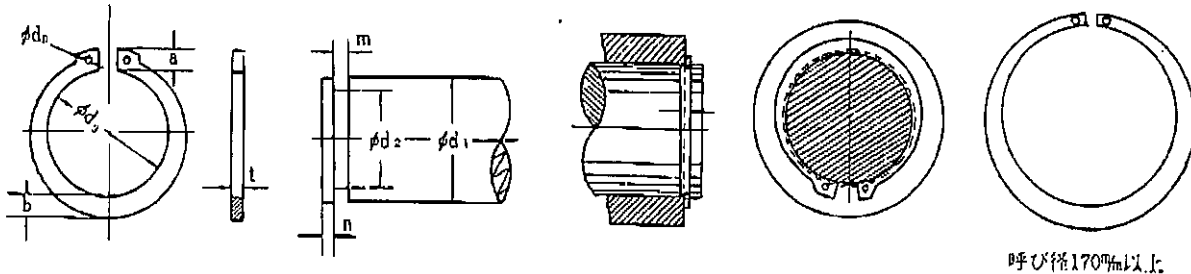

呼び径 d_1	止メ輪 寸法							
	d_2		t		b 約	d_0 最少		
	寸法	公差	寸法	公差				
310	293	+0.81 -1.62	6	± 0.2	17	5		
320	303				17			
330	313	18						
340	323	18						
350	333	20						
360	343	20						
370	353	20						
380	363	20						
390	373	20						
400	383	20						
410	390	7			± 0.2		23	6
420	400						23	
430	410		23					
440	420		23					
450	430		23					
460	440		24					
470	450		24					
480	460		24					
490	470		24					
500	480		24					
510	485		8	± 0.2		25	6	
520	495					25		
530	505	25						
540	515	25						
550	525	25						
560	535	26						
570	545	26						
580	555	26						
590	565	26						
600	575	26						

その他、規格外及び図面に依る呼び径300以上1,000迄、設計製作いたします。